


## Adattatore EEC 32 A (32443)

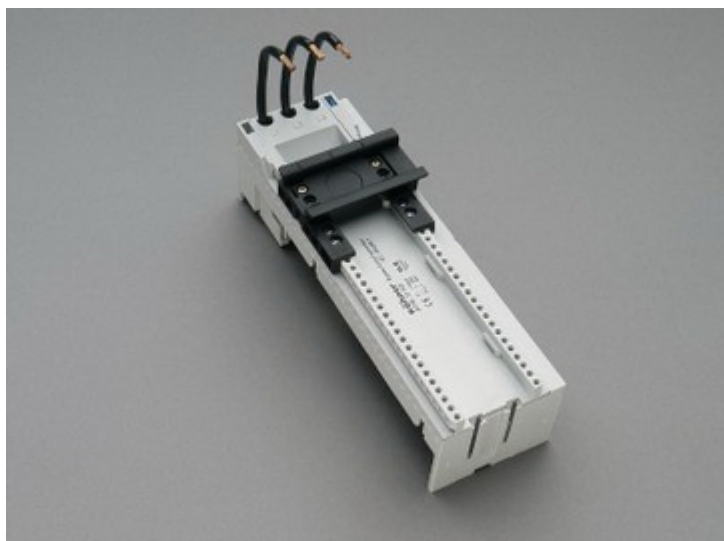

### Descrizione

#### Articolo

Cod.art.: 32443

EQUES® 60Classic

Adattatore EEC 32 A

con 1 guida DIN scorrevole

63 x 200, con cavi AWG 10 (6 mm<sup>2</sup>)

per barre 12, 15, 20, 25, 30 x 5, 10 e barre profilate

#### Montaggio

60Classic

Gruppo di prodotti 05

Sottogruppo merceologico 21

Pz / conf. 4

EAN 4021267324438

## Vantaggi prodotto

Conductor ends ultrasonically sealed.

Click mechanism when pushing onto the busbar.

Catalog page 2018 : 3.11

eCl@ss 6.1 27370304

27370304

ETIM 4.0 EC001531

ETIM 5.0 EC001531

## Certificazioni

### Norme

IEC 61439-1:2011

### Omologazioni

CSA , UL , Germanischer Lloyd



for UL feeder circuits >250V

Type No.: EEC6032-L

UL file: E123577, UL category (for USA): NMTR <http://www.ul.com>

UL file: E123577, UL category (for Canada): NMTR7 <http://www.ul.com>

CSA file: 110285, CSA class: 3211-37 <http://directories.csa-international.org>

Omologazione CCC : no certification required

## Dati prodotto

### Valori elettrici

Corrente nominale (IEC): 32 A

Tensione nominale (IEC) AC: 690

V

Rated current (UL): 30 A

Rated voltage (UL) AC: 600

V

Power dissipation:

The power dissipation at a typical load of 80% of the rated current results to 1.5 W.

(The power dissipation for operation with rated current would be 2.4 W.)

rated isolation voltage  $U_i$ : 800  
V

Tensione di picco  $U_{imp}$ : 6 kV

Tensione max. IEC AC: 800  
V

Tensione max. IEC DC: 800  
V

short-circuit  
withstandability: the short-circuit capacity of the combination of adapter and motor starter  
depends on the motor starter

### Valori meccanici

L x H x P: 63 x 200 x 63

Peso: 44.5 kg/100

Poli: 3 poli

per barre: 12, 15, 20, 25, 30 x 5, 10 e barre profilate

### Proprietà materiali

Involucro: temperature stability 125°C,  
self-extinguishing in acc. to UL 94,  
creepage resistance CTI 600,  
halogen-free

Guida: temperature stability 125°C,  
DIN: self-extinguishing in acc. to UL 94,  
creepage resistance CTI 550,  
halogen-free


Viti: screw +/- (PZ1), galvanized, chromized

Conductor insulation: temperature-resistant up to 105 °C

### Avvisi e consigli


For compact mounting of complete motor circuits with commercially available switchgear and safe mechanical and electrical connection to the busbar system.

## Accessori



**32969**

Bloccaggio laterale per guide DIN



**32963**

Modulo laterale per adattatori EEC

per entrambi i lati

9 x 200